


LED T5 BATTEN



LED T5 Batten

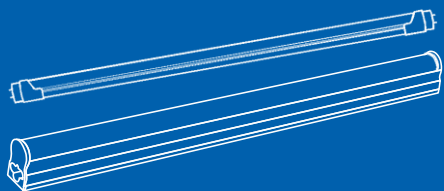


LED T5

Features:

- ◎ Single-end power supply, convenient and easy installation
- ◎ Optical design: PC shade, High transmittance
- ◎ High-end LED Chip: Encapsulation by golden thread, 80% energy saving
- ◎ Intelligent IC Power: Constant current driver, with overload, short-circuit and under-voltage protection
- ◎ Semi aluminum semi plastic lamp body: Excellent heat dissipation performance
- ◎ Copper nickel plated connector, High antioxidant, Safety-connection

Applications:

Household, hotel, villa, shopping mall, meeting room, hospital, office etc.

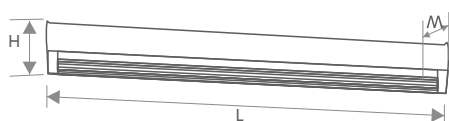

Technical parameter

Model No.	Power(W)	Ra	CCT(K)	Dimensions L×W×H(mm)	Lumen(lm)	Input Voltage(V)	Beam Angle (°)
GNEP-T50100431	4	70	3000	298×22×35	280	AC 180-264V	180°
GNEP-T50100441	4	70	4000	298×22×35	280	AC 180-264V	180°
GNEP-T50100461	4	70	6000	298×22×35	280	AC 180-264V	180°
GNEP-T50100731	7	70	3000	560×22×35	550	AC 180-264V	180°
GNEP-T50100741	7	70	4000	560×22×35	550	AC 180-264V	180°
GNEP-T50100761	7	70	6000	560×22×35	550	AC 180-264V	180°
GNEP-T50101131	11	70	3000	860×22×35	825	AC 180-264V	180°
GNEP-T50101141	11	70	4000	860×22×35	825	AC 180-264V	180°
GNEP-T50101161	11	70	6000	860×22×35	825	AC 180-264V	180°
GNEP-T50101431	14	70	3000	1160×22×35	1100	AC 180-264V	180°
GNEP-T50101441	14	70	4000	1160×22×35	1100	AC 180-264V	180°
GNEP-T50101461	14	70	6000	1160×22×35	1100	AC 180-264V	180°