

LED Panel Light




LED Panel Light-02

Features:

- ◎ Exclusive use for integrated ceiling, replace aluminum gusset perfectly.
- ◎ Aircraft-grade aluminum, laser-engraved Logo, with utmost noble quality.
- ◎ Optical design: High quality light panel, louver, reflective sheeting etc. efficient energy-saving, uniform light emitting.
- ◎ High-end LED chip: Encapsulation by gold thread, 80 percent energy saving.
- ◎ Intelligent IC power supply: Constant current driver, with overloa, short-circuit, under voltage protection.

Applications:

Household, hotel, villa, shopping mall, meeting room, hospital, office etc.

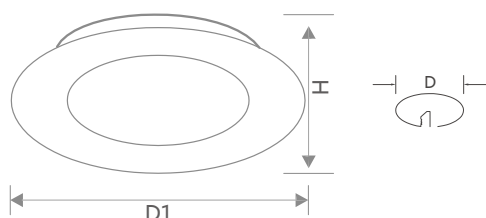

Technical parameter

Model No.	Power(W)	Ra	CCT(K)	Dimensions D1×H(mm)	Cutout D(mm)	Lumen(lm)	Input Voltage(V)	Beam Angle (°)
GNEP-PB0200331-Y	3	70	3000	Ø85×25	Ø75	120	100-240V	120°
GNEP-PB0200631-Y	6	70	3000	Ø120×25	Ø110	290	100-240V	120°
GNEP-PB0200931-Y	9	70	3000	Ø146×25	Ø135	500	100-240V	120°
GNEP-PB0201231-Y	12	70	3000	Ø172×25	Ø160	720	100-240V	120°
GNEP-PB0201531-Y	15	70	3000	Ø200×25	Ø190	900	100-240V	120°
GNEP-PB0201831-Y	18	70	3000	Ø225×25	Ø205	1080	100-240V	120°
GNEP-PB0200341-Y	3	70	4000	Ø85×25	Ø75	120	100-240V	120°
GNEP-PB0200641-Y	6	70	4000	Ø120×25	Ø110	290	100-240V	120°
GNEP-PB0200941-Y	9	70	4000	Ø146×25	Ø135	500	100-240V	120°
GNEP-PB0201241-Y	12	70	4000	Ø172×25	Ø160	720	100-240V	120°
GNEP-PB0201541-Y	15	70	4000	Ø200×25	Ø190	900	100-240V	120°
GNEP-PB0201841-Y	18	70	4000	Ø225×25	Ø205	1080	100-240V	120°
GNEP-PB0200361-Y	3	70	6000	Ø85×25	Ø75	120	100-240V	120°
GNEP-PB0200661-Y	6	70	6000	Ø120×25	Ø110	290	100-240V	120°
GNEP-PB0200961-Y	9	70	6000	Ø146×25	Ø135	500	100-240V	120°
GNEP-PB0201261-Y	12	70	6000	Ø172×25	Ø160	720	100-240V	120°
GNEP-PB0201561-Y	15	70	6000	Ø200×25	Ø190	900	100-240V	120°
GNEP-PB0201861-Y	18	70	6000	Ø225×25	Ø205	1080	100-240V	120°

