

CJX2 AC Contactor

Standard: IEC 60947-4-1



Function

CJX2 AC contactors provide:


- Remote make & break of circuits
- Frequent start and stop of motors

Order Information



Motor P(kW) 380V	Rated current(A)	Auxiliary contact		Reference
		NO	NC	
5.5	9	1	0	CJX2910*
		0	1	CJX2901*
7.5	12	1	0	CJX21210*
		0	1	CJX21201*
10	18	1	0	CJX21810*
		0	1	CJX21801*
15	25	1	0	CJX22510*
		0	1	CJX22501*
18.5	32	1	0	CJX23210*
		0	1	CJX23201*
30	40	1	1	CJX24011*
33	50	1	1	CJX25011*
37	65	1	1	CJX26511*
45	80	1	1	CJX28011*
55	95	1	1	CJX29511*

Reference Description

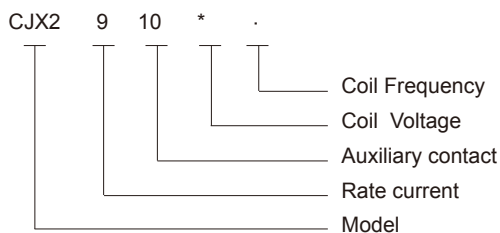

■ Coil voltage code

coil voltage	24V	36V	110V	127V	220V	380V	400V
*	B	C	F	S	M	Q	V

■ Coil frequency code

coil frequency	50Hz	60Hz
.	5	6